

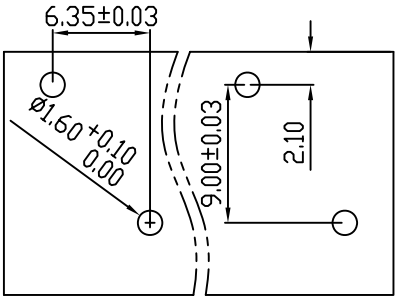
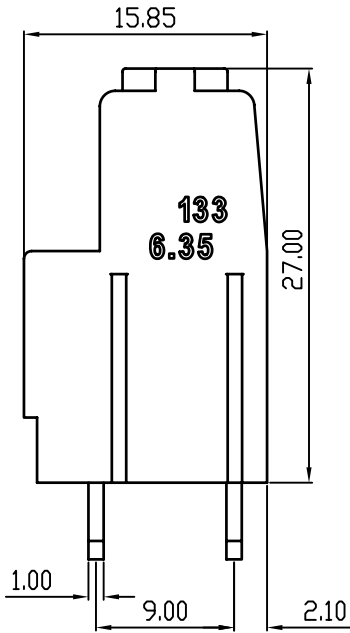
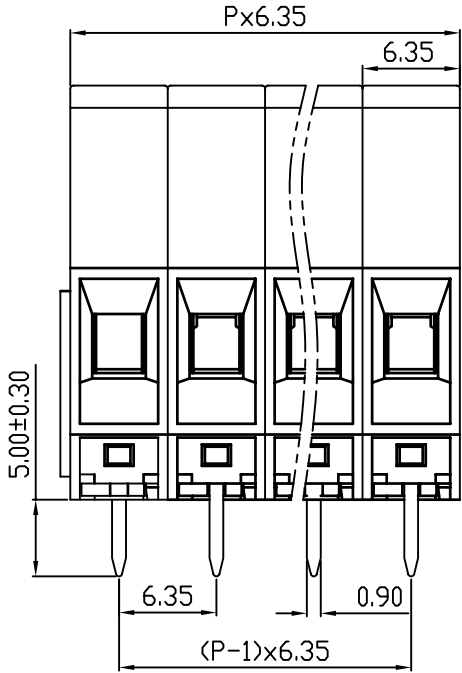


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

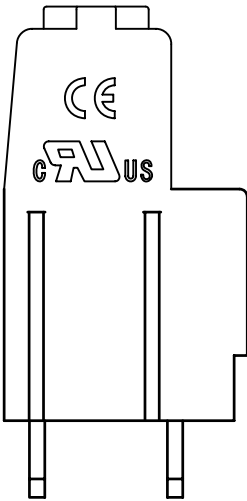


PCB LAYOUT

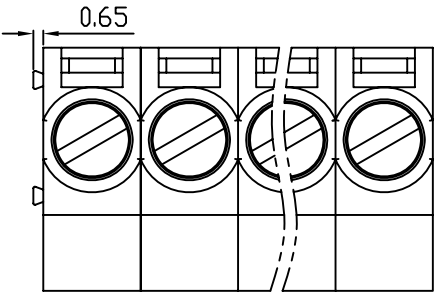

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03.15

UL/CUL 技术 参数 UL/CUL Technical Data					
等 级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	300	-	300
额定电流	Rated Current	[A]	30	-	10
接线范围	Wire Range		24-10		
单/多芯线	Solid/Stranded	[AWG]			
耐电压	Withstanding Voltage		1600V/1Min		
IEC 技术参数 IEC Technical Data					
过电压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage	[V]	500	630	1000
额定电流	Rated Current	[A]	41	41	41
额定冲击电压	Impulse withstand voltagea	[KV]	6.0	6.0	6.0
导线截面积	Conductor cross section		6.0		
硬质/柔性导线	Solid/ flexible	[mm²]			
材 料 Material					
绝缘材料	Insulation Material		PA66		
阻燃等级	Imflammability		UL94V-0		
导体材料	Contactor Material		铜合金 Copper alloy		
导体表面镀层	Contactive Coating		镀锡 Tin Plated		
一般参数 Other Data					
间距 Pitch		[mm]	6.35		
极数 Poles		[P]	2-24		
剥线长度 Stripping Length		[mm]	8-9		
螺丝 Screw/扭矩 Torque(Max)		[N.m]	M3/0.5		
工作温度 Operating temperatur		[°C]	-40~+105		
引针尺寸 Pin Dimensions		[mm]	5.0		
PCB板孔径 PCB Hole Diameter		[mm]	1.6		

DES.	LQQ	DATE	21.03.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION		版本 /	A
CHK.	SY	DATE	21.03.15	SHANGHAI SHANYE ELECTRONICS CO,LTD								REV	
APP.	CLF	DATE	21.03.15							名称 /	133A-6.35		
											TITLE		