
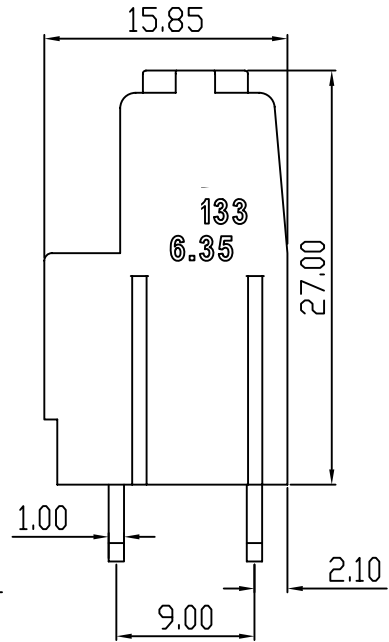
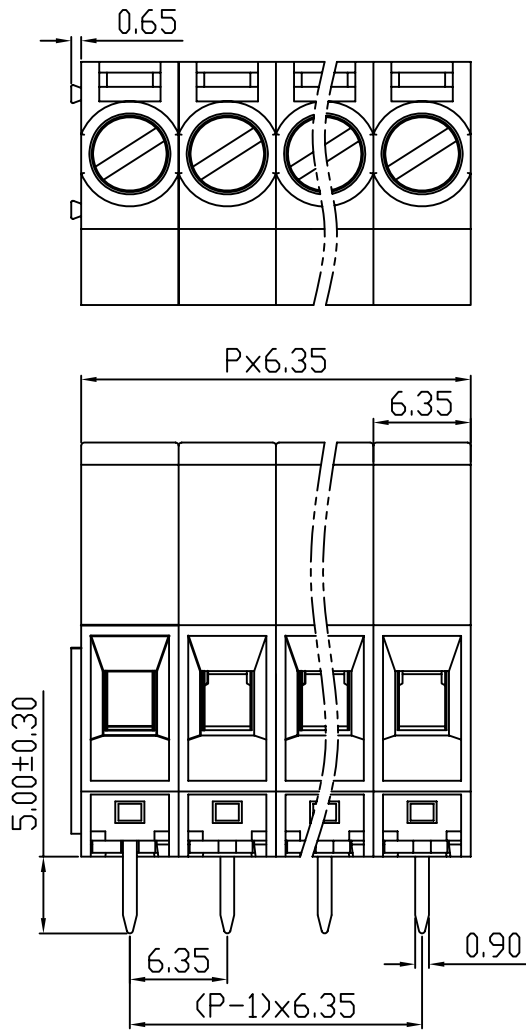
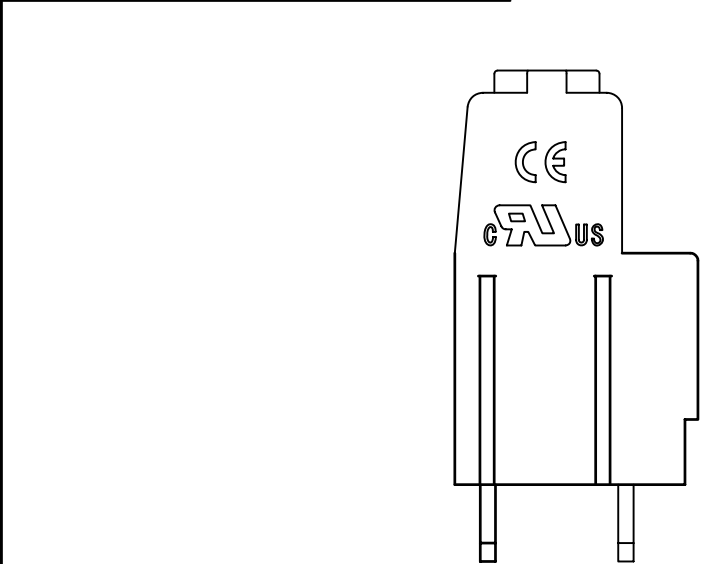


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

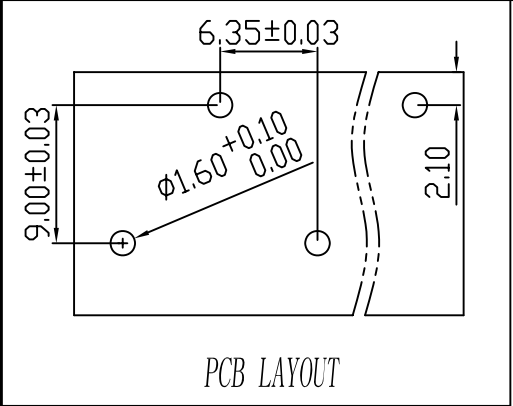

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.04

UL/CUL 技术参数		UL/CUL Technical Data				
等 级	Use Group	B	C	D		
额定电压	Rated Voltage [V]	300	-	300		
额定电流	Rated Current [A]	30	-	10		
接线范围	Wire Range	24-10				
单/多芯线	Solid/Stranded [AWG]					
耐电压	Withstanding Voltage	1600V/1Min				
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category	III	III	II		
污染等级	Contamination Class	3	2	2		
额定电压	Rated Voltage [V]	500	630	1000		
额定电流	Rated Current [A]	41	41	41		
额定冲击电压		6.0	6.0	6.0		
Impulse withstand voltagea	[KV]					
导线截面积	Conductor cross section	6.0				
硬质/柔性导线	Solid/ flexible [mm²]					
材 料 Material						
绝缘材料	Insulation Material	PA66				
阻燃等级	Imflamability	UL94V-0				
导体材料	Contact Material	铜合金 Copper alloy				
导体表面镀层	Contactive Coating	镀锡 Tin Plated				
一般参数 Other Data						
间距 Pitch	[mm]	6.35				
极数 Poles	[P]	2-24				
剥线长度 Stripping Length	[mm]	8-9				
螺丝 Screw/ 扭矩 Torque(Max)	[N.m]	M3/0.5				
工作温度 Operating temperatur	[°C]	-40~+105				
引针尺寸 Pin Dimensions	[mm]	5.0				
PCB板孔径 PCB Hole Diameter	[mm]	1.6				

DES.	LQQ	DATE	21.03.15
CHK.	SY	DATE	21.03.15
APP.	CLF	DATE	21.03.15

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
SHANGHAI SHANYE ELECTRONICS CO.,LTD					

第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
		名称 / TITLE	133B-6.35