

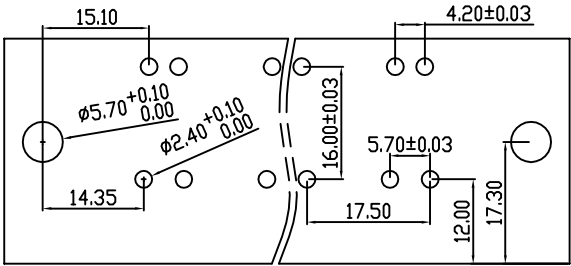
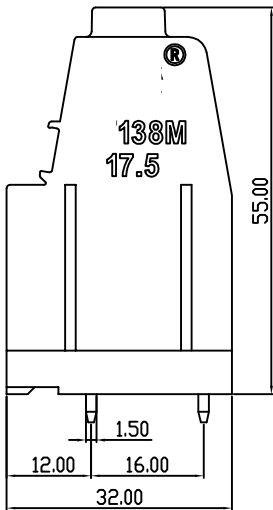
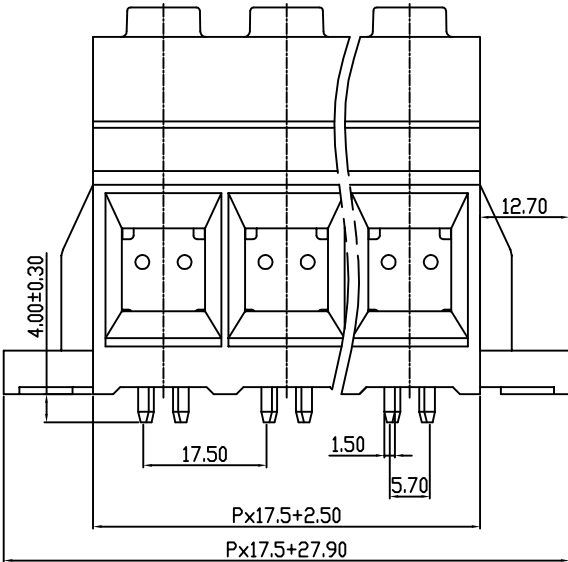


linear dimension(Tolerances Standard GB/T 14486-2008)								—   		
variable range	to	over	over	over	over	over	over		over	over
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to	to 10	10 to 100	100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

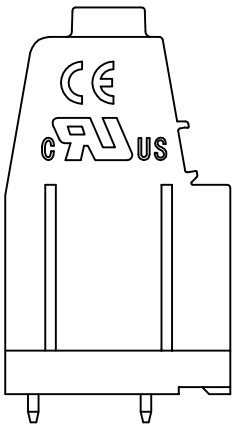

PCB LAYOUT

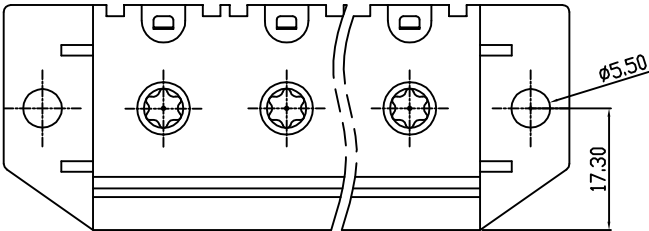

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.08

UL/CUL 技术 参数

UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	-
额定电流	Rated Current [A]	160	160	-
接线范围	Wire Range	16-2/0		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	2200V/1Min		

IEC 技术参数

IEC Technical Data

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	192	192	192
额定冲击电压	Impulse withstand voltagea [KV]	8	8	8
导线截面积	Conductor cross section	70		
硬质/柔性导线	Solid/flexible [mm²]			

材 料


绝缘材料	Insulation Material	PA66
阻燃等级	Imflammability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀锡 Tin Plated

一般参数

间距	Pitch [mm]	17.5
极数	Poles [P]	02~12
剥线长度	Stripping Length [mm]	20
螺丝	Screw/扭矩 Torque(Max) [N.m]	M6/5.5
工作温度	Operating temperatur [°C]	-40~105
引针尺寸	Pin Dimensions [mm]	4.0
PCB板孔径	PCB Hole Diameter [mm]	2.4/5.7

DES.	SJD	DATE	22.03.15
CHK.	BY	DATE	22.03.15
APP.	CLF	DATE	22.03.15

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
SHANGHAI SHANYE ELECTRONICS CO.,LTD					

第三视角 / THIRD ANGLE PROJECTION		版本 /	A
		名称 /	138M-17.5
TITLE			