

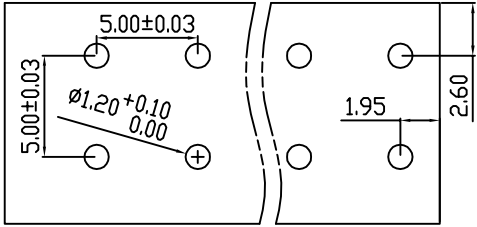
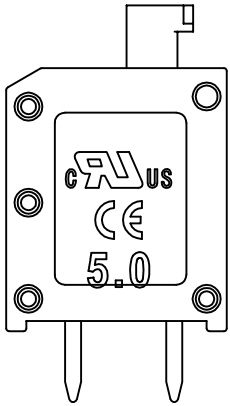
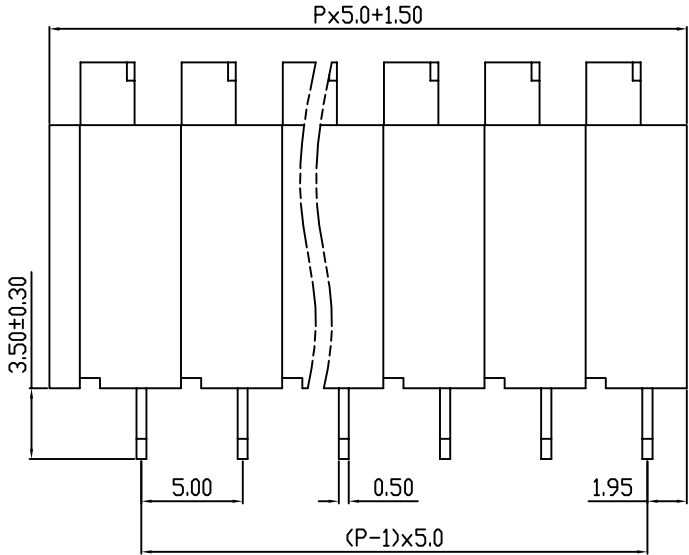


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

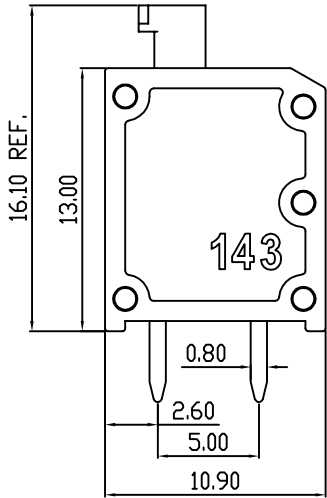

PCB Layout

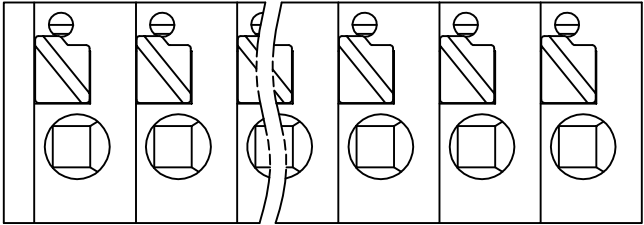

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03

UL/CUL 技术参数					
UL/CUL Technical Data					
等 级		Use Group	B	C	D
额定电压		Rated Voltage [V]	300	-	300
额定电流		Rated Current [A]	10	-	10
接线范围		Wire Range	20-16		
单/多芯线		Solid/Stranded [AWG]			
耐电压		Withstanding Voltage	1600V/1Min		
IEC 技术参数					
IEC Technical Data					
过电压类别		Overvoltage Category	III	III	II
污染等级		Contamination Class	3	2	2
额定电压		Rated Voltage [V]	320	320	630
额定电流		Rated Current [A]	10	10	10
额定冲击电压		Impulse withstand voltagea [KV]	4.0	4.0	4.0
导线截面积		Conductor cross section	1.5		
硬质/柔性导线		Solid/ flexible [mm ²]			
材 料					
绝缘材料		Insulation Material	PA66		
阻燃等级		Imflammability	UL94V-0		
导体材料		Contact Material	铜合金 Copper alloy		
导体表面镀层		Contactive Coating	镀锡 Tin Plated		
一般参数 Other Data					
间距 Pitch		[mm]	5.0		
极数 Poles		[P]	01~XX		
剥线长度 Stripping Length		[mm]	9		
螺丝 Screw/扭矩 Torque(Max)		[N.m]	-		
工作温度 Operating temperatur		[°C]	-40~+105		
引针尺寸 Pin Dimensions		[mm]	3.5		
PCB板孔径 PCB Hole Diameter		[mm]	1.20		

DES.	SJD	DATE	21.10.09	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	21.10.09	SHANGHAI SHANYE ELECTRONICS CO.,LTD						名称 / TITLE	143-5.0	
APP.	CLF	DATE	21.10.09									