



linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

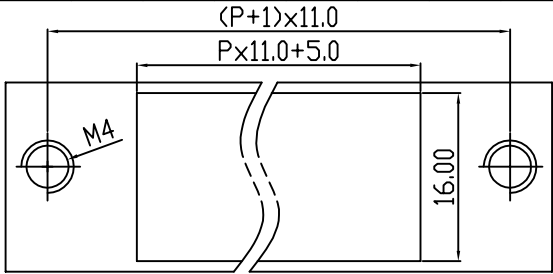

PCB LAYOUT

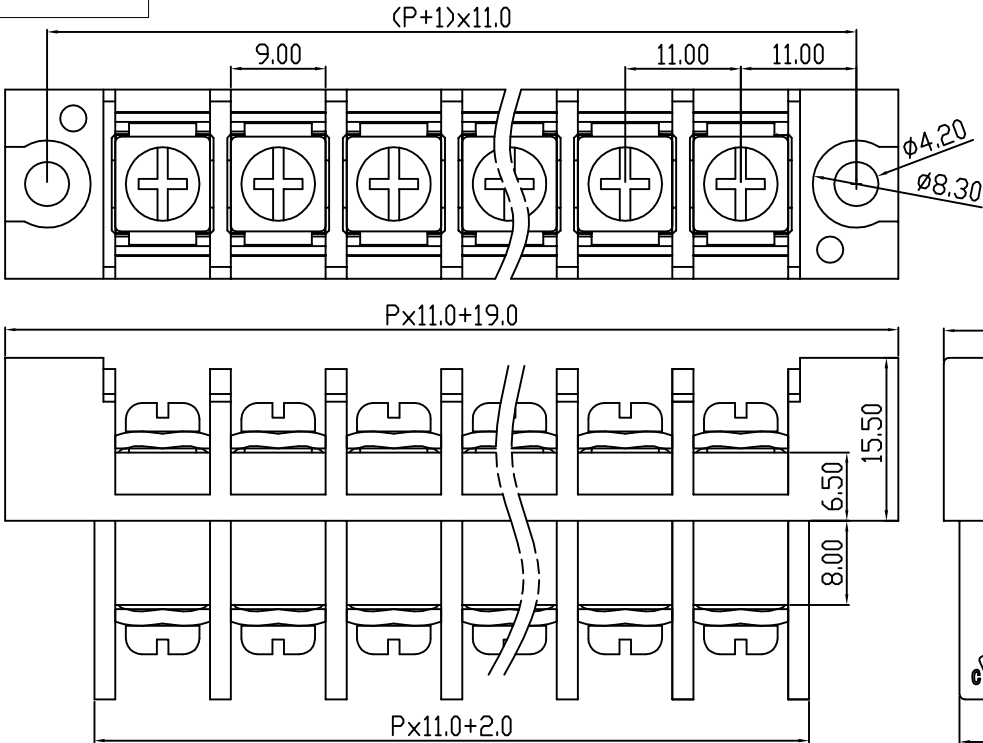

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03

UL/CUL 技术 参数 UL/CUL Technical Data						
等 级	Use Group	B	C	D		
额定电压	Rated Voltage [V]	300	-	-		
额定电流	Rated Current [A]	20	-	-		
接线范围	Wire Range					22-12
单/多芯线	Solid/Stranded [AWG]					
IEC 技术参数 IEC Technical Data						
额定电压	Rated Voltage [V]					450
额定电流	Rated Current [A]					32
耐电压	Withstanding Voltage					2500V/1Min
导线截面积	Conductor cross section					4.0
硬质/柔性导线	Solid/flexible [mm²]					
材 料					Material	
绝缘材料	Insulation Material					PBT
阻燃等级	Imflamability					UL94V-0
导体材料	Contactur Material					铜合金 Copper alloy
导体表面镀层	Contactive Coating					镀镍 Ni plating
一般参数					Other Data	
间距	Pitch [mm]					11.0
极数	Poles [P]					2-15
剥线长度	Stripping Length [mm]					-
螺丝	Screw/扭矩 Torque(Max) [N.m]					M4/1.8
工作温度	Operating temperatur [°C]					-30~+120
引针尺寸	Pin Dimensions [mm]					-
PCB板孔径	PCB Hole Diameter [mm]					-

DES.	LQQ	DATE	21.12.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A	
CHK.	BY	DATE	21.12.15	SHANGHAI SHANYE ELECTRONICS CO.,LTD							名称 / TITLE		27-11.0	
APP.	CLF	DATE	21.12.15											