
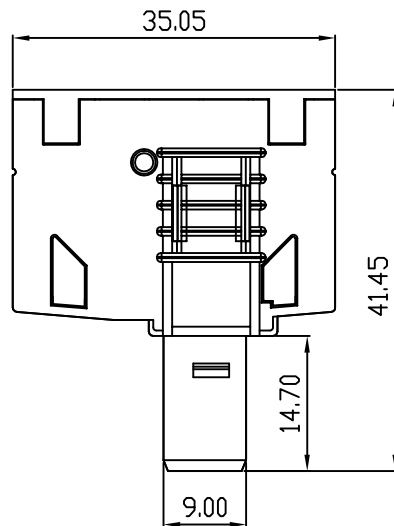
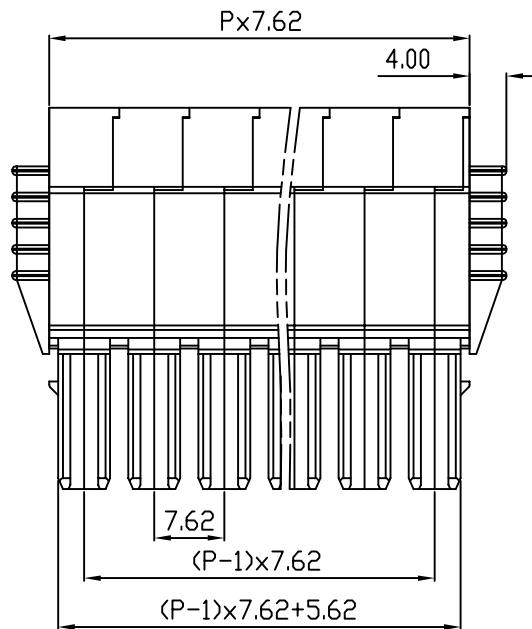
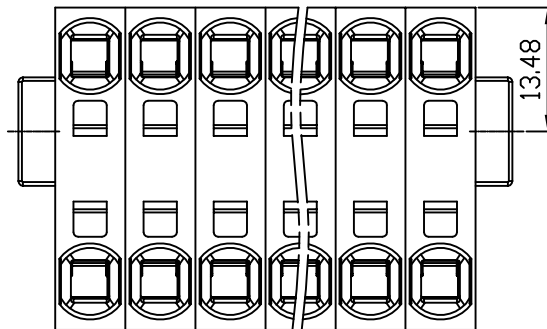
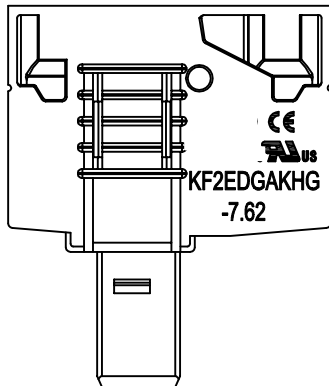


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over	over	over	over	over	over		over	over
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to	to 10	10 to 100	100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.09.04



UL/CUL 技术参数 UL/CUL Technical Data							
等级	Use Group		B	C	D		
额定电压	Rated Voltage	[V]	600	-	600		
额定电流	Rated Current	[A]	31	-	5		
接线范围	Wire Range		24-8				
单/多芯线	Solid/Stranded	[AWG]					
耐电压	Withstanding Voltage		2200V/1Min				
IEC 技术参数 IEC Technical Data							
过电压类别	Overvoltage Category		III	III	II		
污染等级	Contamination Class		3	2	2		
额定电压	Rated Voltage	[V]	630	1000	1000		
额定电流	Rated Current	[A]	41	41	41		
额定冲击电压	Impulse withstand voltage	[KV]	8	8	6		
导线截面积	Conductor cross section		0.2-6.0				
硬质/柔性导线	Solid/flexible	[mm ²]					
材料							
绝缘材料	Insulation Material		PA66				
阻燃等级	Imflammability		UL94V-0				
导体材料	Contact Material		铜合金 Copper alloy				
导体表面镀层	Contactive Coating		镀锡 Tin Plated				
一般参数							
间距	Pitch	[mm]	7.62				
极数	Poles	[P]	2-16				
剥线长度	Stripping Length	[mm]	15~16				
螺丝	Screw/扭矩	Torque(Max) [N.m]	-				
工作温度	Operating temperatur	[°C]	-40~+105				
引针尺寸	Pin Dimensions	[mm]	-				
PCB板孔径	PCB Hole Diameter	[mm]	-				

DES.	LQQ	DATE	21.09.04	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	21.09.04	SHANGHAI SHANYE ELECTRONICS CO ,LTD								
APP.	CLF	DATE	21.09.04							名称 / TITLE	2EDGAKHG-7.62	