
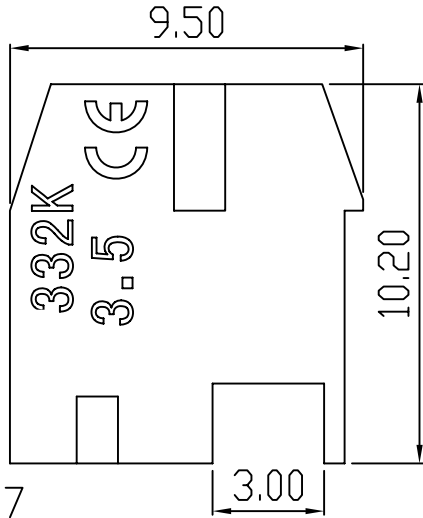
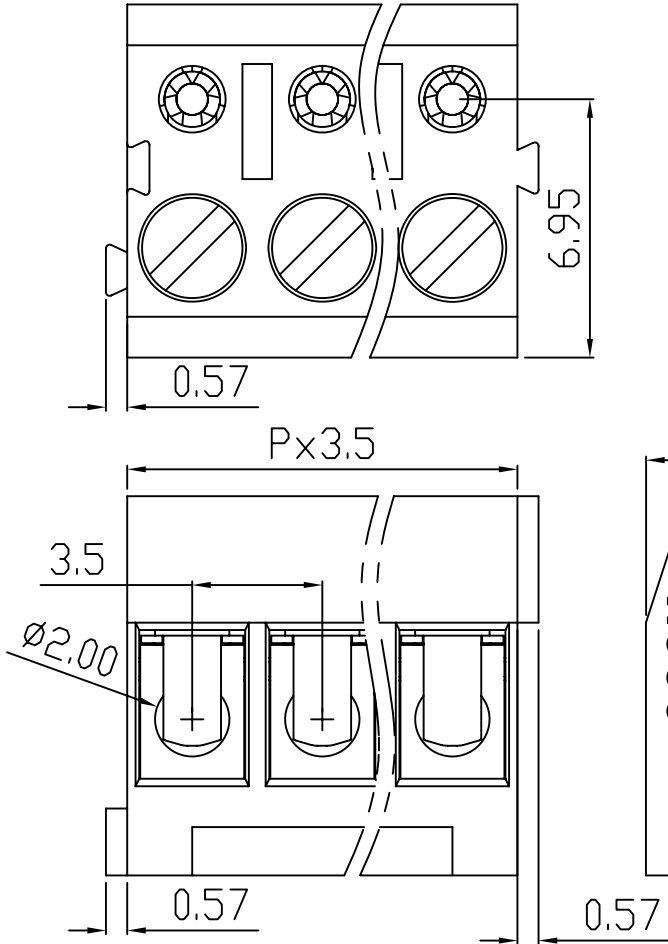
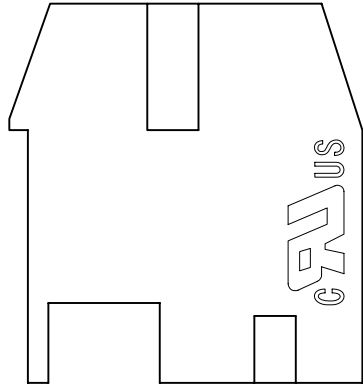


| linear dimension(Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             | —     |  |  |
|-------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| variable range                                        | to 6  | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100                                                                  | over 100 to                                                                     |
| tolerance                                             | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30                                                                            | 0.60                                                                            |



| REVISION RECORD |             |         |          |       |
|-----------------|-------------|---------|----------|-------|
| REV.            | DESCRIPTION | ECN No. | APPROVED | DATE  |
| A               | 新发行         |         | CLF      | 21.03 |
|                 |             |         |          |       |
|                 |             |         |          |       |
|                 |             |         |          |       |

|                                                                                     |                                 |                  |     |     |
|-------------------------------------------------------------------------------------|---------------------------------|------------------|-----|-----|
| UL/CUL 技术参数                                                                         |                                 |                  |     |     |
| UL/CUL Technical Data                                                               |                                 |                  |     |     |
|  |                                 |                  |     |     |
| 等级                                                                                  | Use Group                       | B                | C   | D   |
| 额定电压                                                                                | Rated Voltage [V]               | 300              | -   | 300 |
| 额定电流                                                                                | Rated Current [A]               | 8                | -   | 10  |
| 接线范围                                                                                | Wire Range                      | 28-16            |     |     |
| 单/多芯线                                                                               | Solid/Stranded [AWG]            |                  |     |     |
| 耐电压                                                                                 | Withstanding Voltage            | 1600V/1Min       |     |     |
| IEC 技术参数                                                                            |                                 |                  |     |     |
| IEC Technical Data                                                                  |                                 |                  |     |     |
| 过电压类别                                                                               | Overvoltage Category            | III              | III | II  |
| 污染等级                                                                                | Contamination Class             | 3                | 2   | 2   |
| 额定电压                                                                                | Rated Voltage [V]               | 160              | 200 | 400 |
| 额定电流                                                                                | Rated Current [A]               | 10               | 10  | 10  |
| 额定冲击电压                                                                              | Impulse withstand voltagea [KV] | 2.5              | 2.5 | 4.0 |
| 导线截面积                                                                               | Conductor cross section         | 1.5              |     |     |
| 硬质/柔性导线                                                                             | Solid/ flexible [mm²]           |                  |     |     |
| 材 料 Material                                                                        |                                 |                  |     |     |
| 绝缘材料                                                                                | Insulation Material             | PA66             |     |     |
| 阻燃等级                                                                                | Imflammability                  | UL94V-0          |     |     |
| 导体材料                                                                                | Contactr Material               | 铜合金 Copper alloy |     |     |
| 导体表面镀层                                                                              | Contactive Coating              | 镀镍 Ni Plated     |     |     |
| 一般参数 Other Data                                                                     |                                 |                  |     |     |
| 间距                                                                                  | Pitch [mm]                      | 3.5              |     |     |
| 极数                                                                                  | Poles [P]                       | 2-24             |     |     |
| 剥线长度                                                                                | Stripping Length [mm]           | 5-6              |     |     |
| 螺丝                                                                                  | Screw/扭矩 Torque(Max) [N.m]      | M2.0/0.2         |     |     |
| 工作温度                                                                                | Operating temperatur [°C]       | -40~+105         |     |     |
| 引针尺寸                                                                                | Pin Dimensions [mm]             | -                |     |     |
| PCB板孔径                                                                              | PCB Hole Diameter [mm]          | -                |     |     |

|      |     |      |          |                                     |    |           |    |            |     |                                                                                       |          |      |   |
|------|-----|------|----------|-------------------------------------|----|-----------|----|------------|-----|---------------------------------------------------------------------------------------|----------|------|---|
| DES. | LQQ | DATE | 21.03.13 | 单位 / UNITS                          | mm | 尺寸 / SIZE | A4 | 比例 / SCALE | 1:1 | 第三视角 / THIRD ANGLE PROJECTION                                                         |          | 版本 / | A |
| CHK. | SY  | DATE | 21.03.13 | SHANGHAI SHANYE ELECTRONICS CO.,LTD |    |           |    |            |     |  |          | REV  |   |
| APP. | CLF | DATE | 21.03.13 |                                     |    |           |    |            |     | 名称 /                                                                                  | 332K-3.5 |      |   |
|      |     |      |          |                                     |    |           |    |            |     | TITLE                                                                                 |          |      |   |