

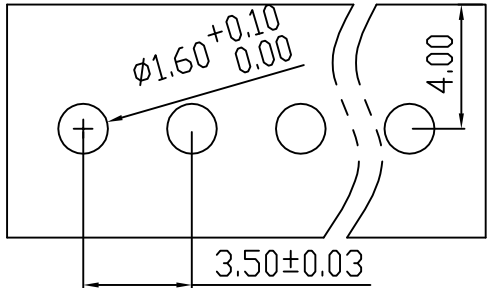
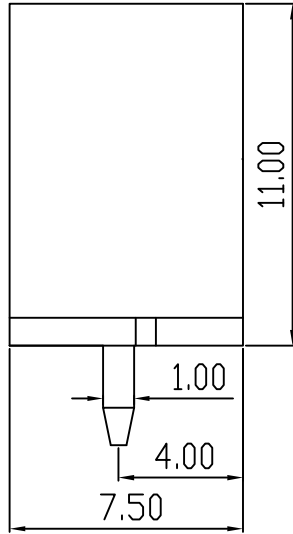
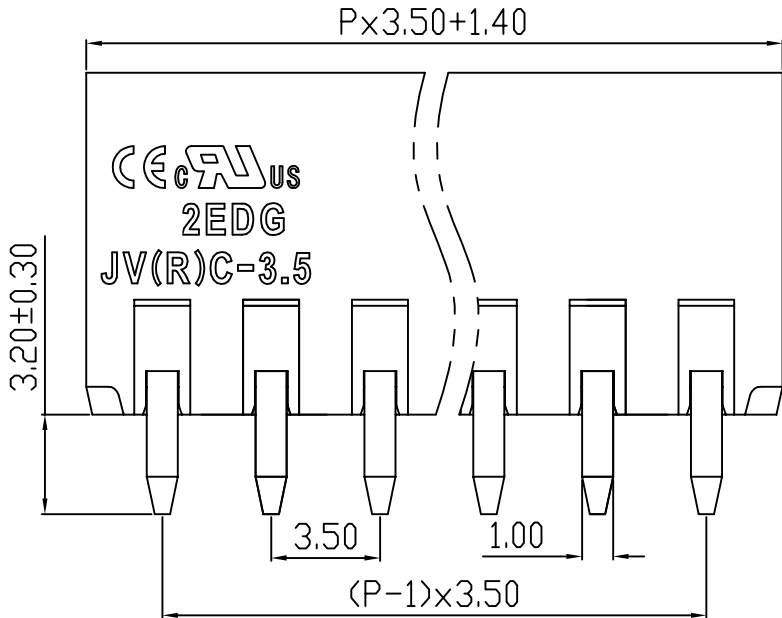


linear dimension(Tolerances Standard GB/T 14486-2008)								— ▧ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

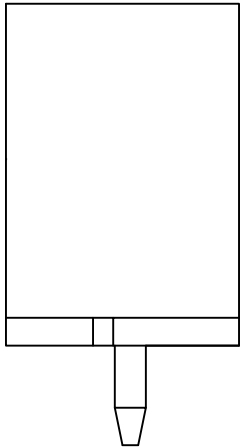

PCB LAYOUT

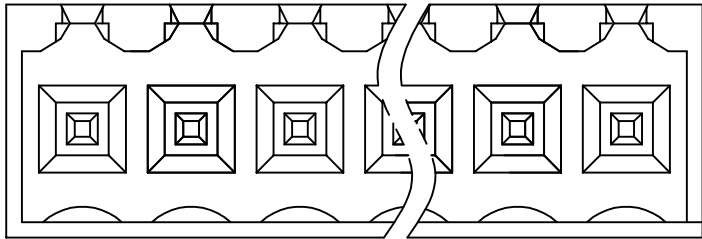

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03

UL/CUL 技术 参数

UL/CUL Technical Data



等 级 Use Group

B C D

额定电压 Rated Voltage [V]

300 - 300

额定电流 Rated Current [A]

10 - 10

接线范围 Wire Range

单/多芯线 Solid/Stranded [AWG]

-

耐电压 Withstanding Voltage

1600V/1Min

IEC 技术参数

IEC Technical Data

过电压类别 Overvoltage Category

III III II

污染等级 Contamination Class

3 2 2

额定电压 Rated Voltage [V]

- 160 320

额定电流 Rated Current [A]

- 13 13

额定冲击电压

Impulse withstand voltagea [KV]

- 2.5 2.5

导线截面积 Conductor cross section

硬质/柔性导线 Solid/ flexible [mm²]

-

材 料 Material

绝缘材料 Insulation Material

PA66

阻燃等级 Imflammability

UL94V-0

导体材料 Contactor Material

铜合金 Copper alloy

导体表面镀层 Contactive Coating

镀锡 Tin Plated

一般参数 Other Data

间距 Pitch [mm]

3.5

极数 Poles [P]

02-24

剥线长度 Stripping Length [mm]

-

螺丝 Screw/扭矩 Torque(Max) [N.m]

-

工作温度 Operating temperatur [°C]

-40~+105

引针尺寸 Pin Dimensions [mm]

3.2

PCB板孔径 PCB Hole Diameter [mm]

1.6

DES.	FZM	DATE	21.03.15
CHK.	SY	DATE	21.03.15
APP.	CLF	DATE	21.03.15

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
SHANGHAI SHANYE ELECTRONICS CO.,LTD					

第三视角/THIRD ANGLE PROJECTION		版本 / REV	A
		名称 / TITLE	2EDGJVC-3.5