
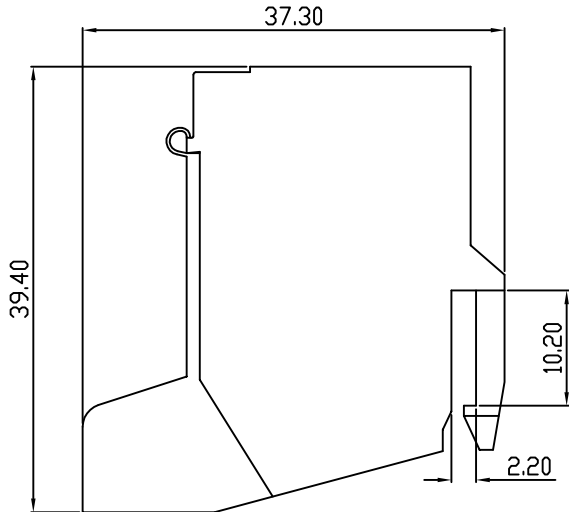
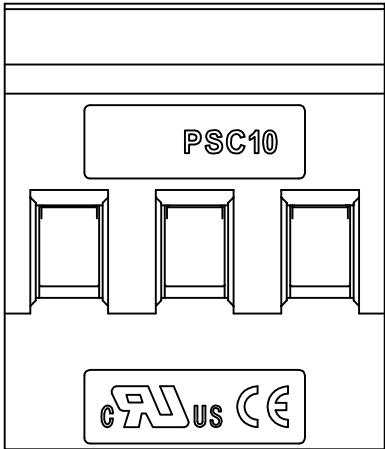


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

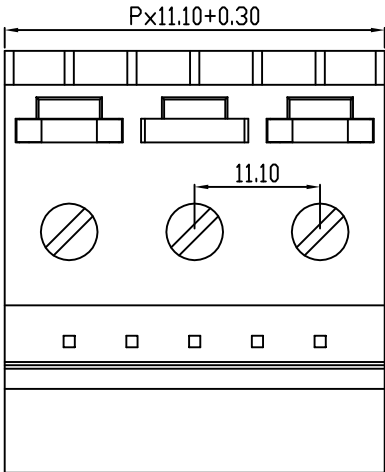

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03

UL/CUL 技术 参数

UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	-
额定电流	Rated Current [A]	65	-	-
接线范围	Wire Range	24-6		
单/多芯线	Solid/Stranded [AWG]			

IEC 技术参数

IEC Technical Data


额定电压	Rated Voltage [V]	750
额定电流	Rated Current [A]	57
耐电压	Withstanding Voltage	3500V/1Min
导线截面积	Conductor cross section	10
硬质/柔性导线	Solid/ flexible [mm ²]	

材 料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Imflammability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀锡 Tin plating

一般参数 Other Data

间距	Pitch [mm]	11.10
极数	Poles [P]	02、03
剥线长度	Stripping Length [mm]	10-12
螺丝	Screw/ 扭矩 Torque(Max) [N.m]	M4/1.2
工作温度	Operating temperatur [°C]	-40~+105
引针尺寸	Pin Dimensions [mm]	-
PCB板孔径	PCB Hole Diameter [mm]	-

DES.	SJD	DATE	21.10.16	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	21.10.16	SHANGHAI SHANYE ELECTRONICS CO.,LTD							名称 / TITLE	
APP.	CLF	DATE	21.10.16								PSC10-11.10	