
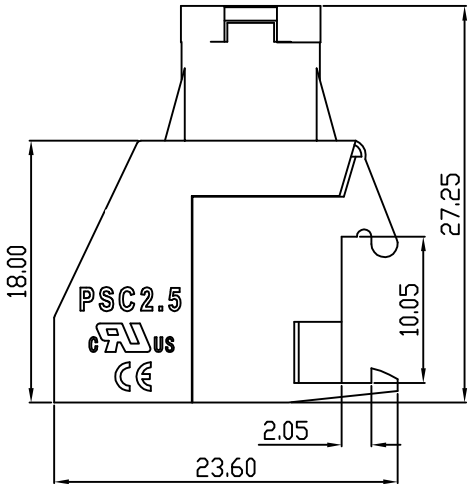
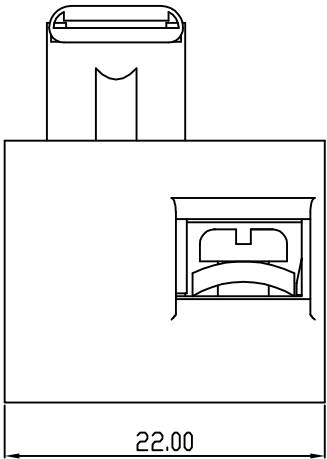


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03

UL/CUL 技术 参数

UL/CUL Technical Data



等级 Use Group

B

C

D

额定电压 Rated Voltage

[V]

250

-

-

额定电流 Rated Current

[A]

6.3

-

-

接线范围 Wire Range

单/多芯线 Solid/Stranded

[AWG]

20-14

IEC 技术参数

IEC Technical Data

额定电压 Rated Voltage

[V]

250

额定电流 Rated Current

[A]

6.3

耐电压 Withstanding Voltage

2000V/1Min

导线截面积 Conductor cross section

硬质/柔性导线 Solid/ flexible

[mm²]

2.5

材 料 Material

绝缘材料 Insulation Material

PA66

阻燃等级 Imflammability

UL94V-0

导体材料 Contactor Material

铜合金 Copper alloy

导体表面镀层 Contactive Coating

镀锡 Tin plating

一般参数 Other Data

间距 Pitch

[mm]

22.0

极数 Poles

[P]

1

剥线长度 Stripping Length

[mm]

8-10

螺丝 Screw/ 扭矩 Torque(Max)

[N.m]

M3.5/0.8

工作温度 Operating temperatur

[°C]

-40~+105

引针尺寸 Pin Dimensions


[mm]

-

PCB板孔径 PCB Hole Diameter

[mm]

-

DES.	SJD	DATE	21.10.16	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 /	A
CHK.	BY	DATE	21.10.16	SHANGHAI SHANYE ELECTRONICS CO.,LTD								REV	
APP.	CLF	DATE	21.10.16							名称 / TITLE		PSC2.5-22.0	